


In stainless steel

J210

J320

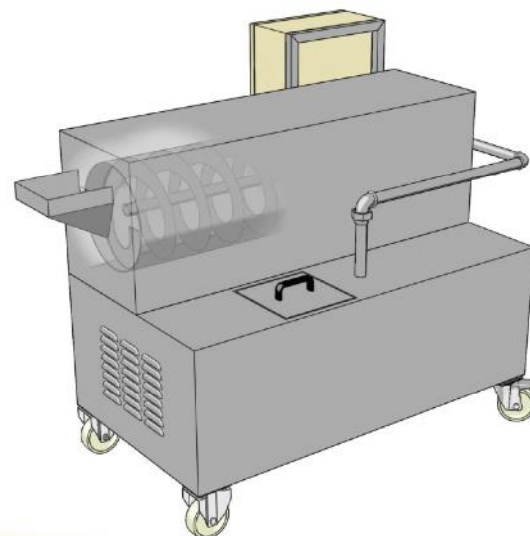

JOLLY LINE

- ◆ **Spiral drum machine with single or multi-stage cleaning and drying capabilities. Complete with immersion and spray wash sections ideal for degreasing a large variety of small turned parts, taps, valves, forgings, pressing, screws and dies etc.**


" In stainless steel "	unit	J210	J320	J210/2	J320/2
Production	CFH	0,7	1,4	0,7	1,4
Drum diameter	inches	8"	12"	8"	12"
Drum lenght	inches	47"	47"	71"	71"
Thread pitch	inches	4"	5"	4"	5"
Thread depth	inches	2"	2"	2"	2"
Diameter holes drum	inches	1/5"	1/5"	1/5"	1/5"
Loading height	inches	35"	35"	35"	35"
Unloading height	inches	21"	21"	21"	21"
Wash tank	gal US	27	27	27	27
Rinse tank	gal US	-	-	27	27
Wash pump	Hp	0,75	0,75	0,75	0,75
Wash flow rate	GPM	21	21	21	21
Pressure	PSI	30	30	30	30
Rinse pump	Hp	-	-	0,75	0,75
Rinse flow rate	GPM	-	-	21	21
Pressure	PSI	-	-	30	30
Wash electrical heating	Kw	8	8	8	8
Rinse electrical heating	Kw	-	-	8	8
Solution temperature	°F	100-140	100-140	100-140	100-140
Steam aspirator	Hp CFM	0,12 60	0,12 60	0,12 60	0,12 60
Overall width	inches	32"	32"	42"	42"
Overall height	inches	54"	54"	65"	65"
Overall depth	inches	65"	65"	90"	90"
Power supply	Volt	460V 3ph+N 60Hz	460V 3ph+N 60Hz	460V 3ph+N 60Hz	460V 3ph+N 60Hz



MAGIDO®



SPIRA LINE






In stainless steel

SP210
SP320
SP480
SP640
SP950

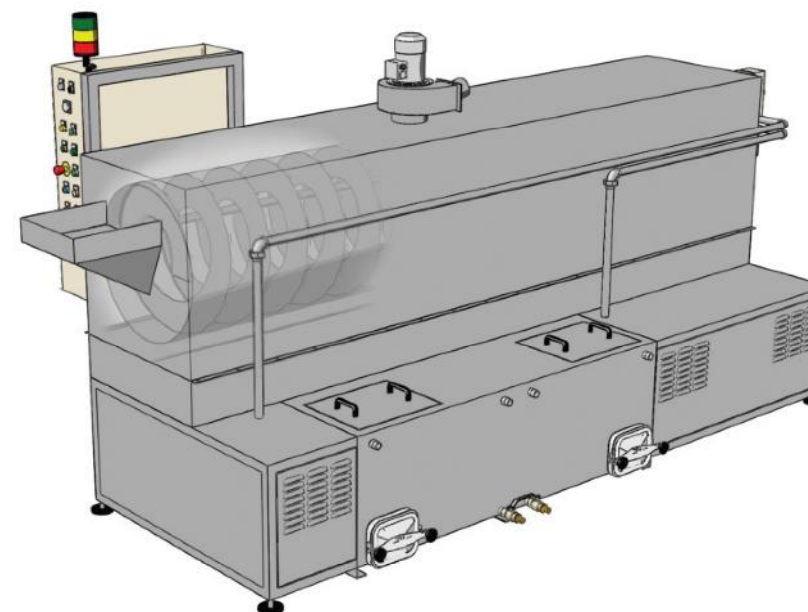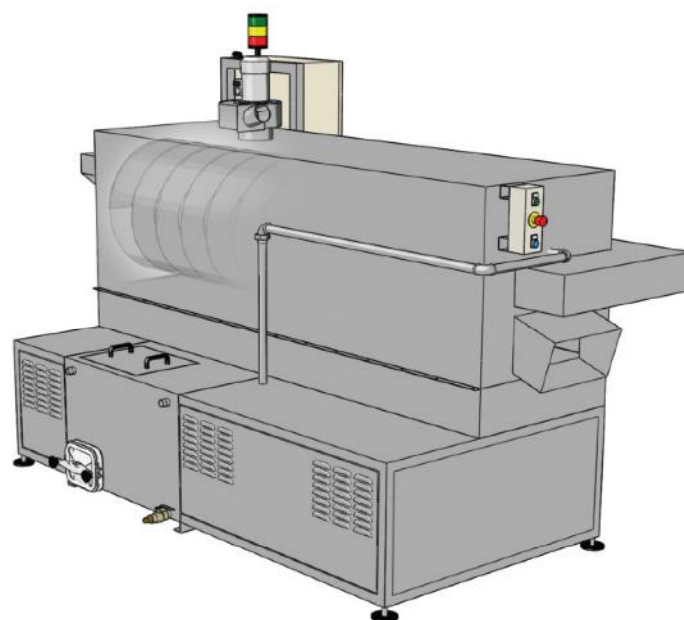

SP210/2
SP320/2
SP480/2
SP640/2
SP950/2



In stainless steel

" In stainless steel "	unit
Production	CFH
Drum diameter	inches
Drum lenght	inches
Thread pitch	inches
Thread depth	inches
Diameter holes drum	inches
Loading height	inches
Unloading height	inches
Wash tank	gal US
Rinse tank	gal US
Wash pump	Hp
Wash flow rate	GPM
Pressure	PSI
Rinse pump	Hp
Rinse flow rate	GPM
Pressure	PSI
Wash electrical heating	Kw
Rinse electrical heating	Kw
Solution temperature	°F
Steam aspirator	Hp CFM
Electric drying	Kw
Overall width	inches
Overall height	inches
Overall depth	inches
Power supply	Volt

SP 210	SP 320	SP 480	SP 640	SP 950
1,6	3,2	6,4	12,7	25
8"	12"	19"	25"	37"
67"	67"	98"	98"	150"
4"	5"	6"	8"	12"
2"	2"	3"	5"	10"
1/5"	1/5"	1/5"	1/5"	1/5"
50"	50"	58"	58"	76"
28"	28"	32"	32"	32"
90	90	130	130	210
-	-	-	-	-
3	3	4	4	5,5
65	65	90	90	105
43	43	43	43	50
-	-	-	-	-
-	-	-	-	-
16	16	24	24	32
-	-	-	-	-
100-160	100-160	100-160	100-160	100-160
0,25 180	0,25 180	0,25 180	0,25 180	0,75 470
9	9	15	15	24
55"	55"	65"	65"	80"
75"	75"	90"	90"	105"
100"	100"	140"	140"	200"
460V 3ph+N 60Hz	460V 3ph+N 60Hz	460V 3ph+N 60Hz	460V 3ph+N 60Hz	460V 3ph+N 60Hz

SP 210/2	SP 320/2	SP 480/2	SP 640/2	SP 950/2
1,6	3,2	6,4	12,7	25
8"	12"	19"	25"	37"
106"	106"	138"	138"	208"
4"	5"	6"	8"	12"
2"	2"	3"	5"	10"
1/5"	1/5"	1/5"	1/5"	1/5"
50"	50"	58"	58"	76"
28"	28"	32"	32"	32"
90	90	130	130	210
90	90	130	130	210
3	3	4	4	5,5
65	65	90	90	105
43	43	43	43	50
3	3	4	4	5,5
65	65	90	90	105
43	43	43	43	50
16	16	24	24	32
12	12	18	18	24
100-160	100-160	100-160	100-160	100-160
0,25 180	0,25 180	0,25 180	0,25 180	0,75 470
9	9	15	15	24
55"	55"	70"	70"	80"
75"	75"	90"	90"	105"
140"	140"	175"	175"	255"
460V 3ph+N 60Hz	460V 3ph+N 60Hz	460V 3ph+N 60Hz	460V 3ph+N 60Hz	460V 3ph+N 60Hz

SPIRA LINE

Spiral drum machine with single or multi-stage cleaning and drying capabilities. Complete with immersion and spray wash sections ideal for degreasing a large variety of small turned parts, taps, valves, forgings, pressing, screws and dies etc. A powerful drying system also ensures that components leave the system clean and dry.